



CATALOG 03/2023-WW-A.5  
INSERTS FOR EUROMAC MULTITOOLS



## SCOPE OF APPLICATION:

Deliveries and services provided by PASS Stanztechnik AG are effected exclusively according to PASS delivery and payment conditions. These conditions shall be deemed accepted at the latest upon receipt of the goods or services.

## GENERAL REMARKS:

You can find our general terms and conditions on our Homepage under: [www.pass-ag.com](http://www.pass-ag.com)

## INSERTS FOR EUROMAC MULTITOOLS

XMTE10-12,7; FMTE10-12,7 .....	page 6
XMTE6-24; XMTE10-24; FMTE6-24; FMTE10-24 .....	page 7
XMTE4-31,75; FMTE4-31,75 .....	page 8

## TECHNICAL INFORMATION

O.D. Ground Special Shapes.....	page 12
EDM Required Special Shapes .....	page 13
PASS tool variety.....	page 14
Lifetime of tools I regrind advice .....	page 15
PASS coating versions / draw-polishing .....	page 16
Die versions.....	page 17
Punches with different shear types.....	page 18
PASS back taper on punches .....	page 19
PASS corner radius on punches.....	page 20
PASS punches with reinforced shoulder.....	page 21



# INSERTS FOR EUROMAC MULTITOOLS

PASS TOOLS FOR YOUR EUROMAC MULTITOOL SYSTEM

## INDEX

XMTE10-12,7; FMTE10-12,7	page 6
XMTE6-24; XMTE10-24; FMTE6-24; FMTE10-24	page 7
XMTE4-31,75; FMTE4-31,75	page 8


# EUROMAC

XMTE10-12,7; FMTE10-12,7

PUNCH  
RIGID

PUNCH ADJUSTABLE

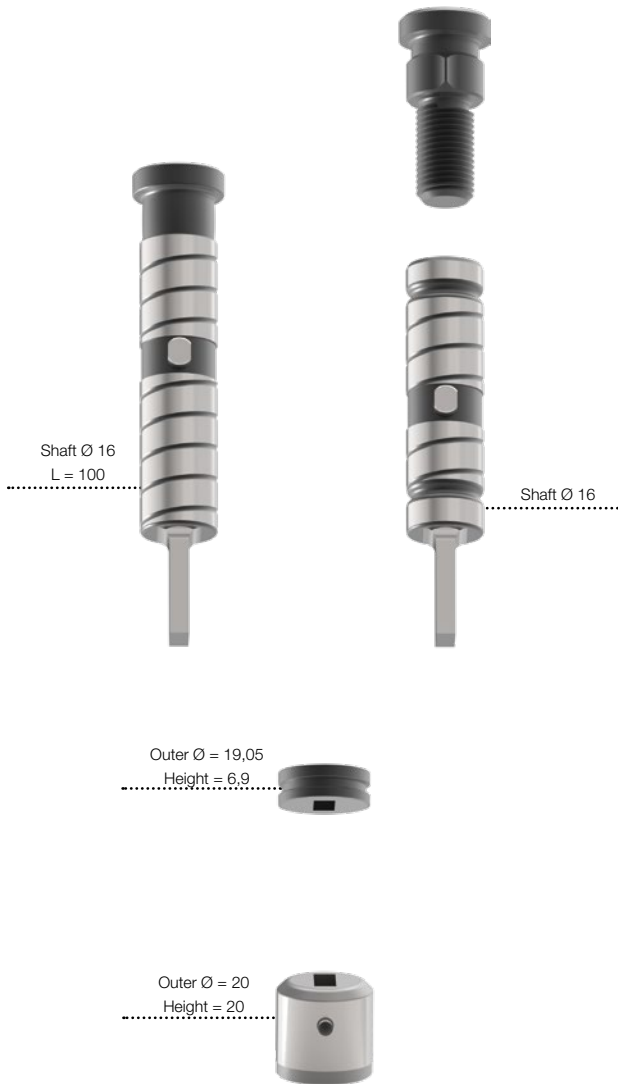PART-NO.



PUNCH - RIGID (H-PM®)		PART-NO.
Round		413101
Square		413102
Rectangle		413103
Oblong		413104
O.D. Ground Special Shape		41310G
EDM Required Special Shape		41310E

PUNCH - ADJUSTABLE (H-PM®)		PART-NO.
Punch head		1999X1791
Round		413101-A
Square		413102-A
Rectangle		413103-A
Oblong		413104-A
O.D. Ground Special Shape		41310G-A
EDM Required Special Shape		41310E-A

STRIPPER		PART-NO.
Round		415101
Square		415102
Rectangle		415103
Oblong		415104
O.D. Ground Special Shape		41510G
EDM Required Special Shape		41510E

DIE (HWS)		PART-NO.
Round		414101
Square		414102
Rectangle		414103
Oblong		414104
O.D. Ground Special Shape		41410G
EDM Required Special Shape		41410E

## ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

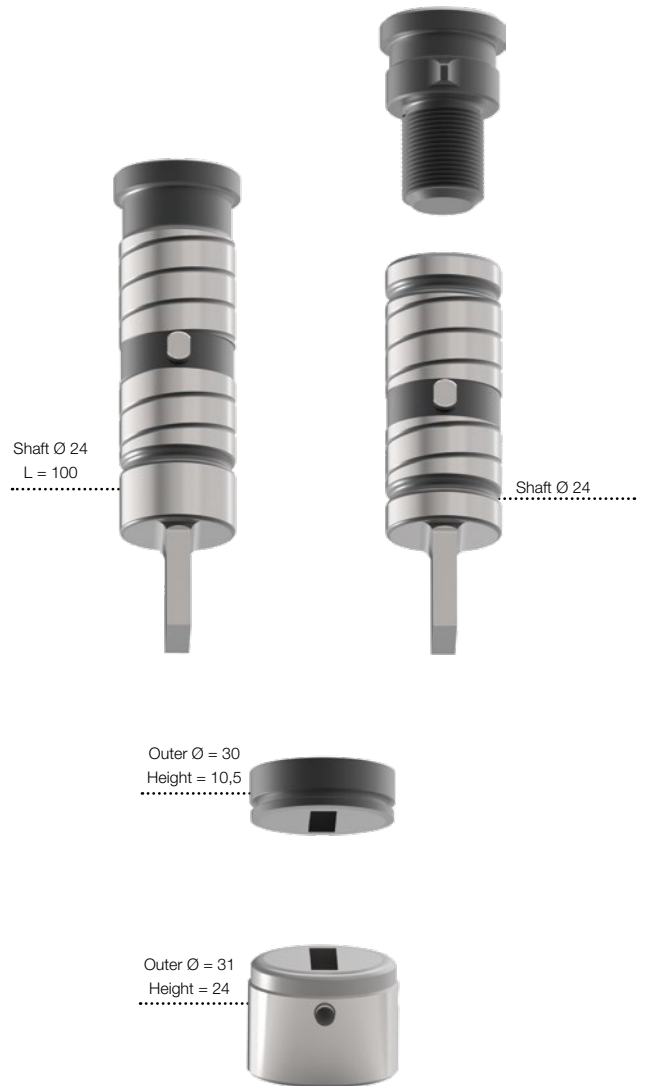
## ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

	PART-NO.
<b>PUNCH - RIGID (H-PM®)</b>	
Round	413041
Square	413042
Rectangle	413043
Oblong	413044
O.D. Ground Special Shape	41304G
EDM Required Special Shape	41304E
<b>PUNCH - ADJUSTABLE (H-PM®)</b>	
Punch head	1999X1691
Round	413041-A
Square	413042-A
Rectangle	413043-A
Oblong	413044-A
O.D. Ground Special Shape	41304G-A
EDM Required Special Shape	41304E-A
<b>STRIPPER</b>	
Round	415041
Square	415042
Rectangle	415043
Oblong	415044
O.D. Ground Special Shape	41504G
EDM Required Special Shape	41504E
<b>DIE (HWS)</b>	
Round	414041
Square	414042
Rectangle	414043
Oblong	414044
O.D. Ground Special Shape	41404G
EDM Required Special Shape	41404E

PUNCH  
RIGID

PUNCH ADJUSTABLE



### ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

### ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

# EUROMAC

XMTE4-31,75; FMTE4-31,75



		PART-NO.
<b>PUNCH (H-PM®)</b>		
	Round	413141
	Square	413142
	Rectangle	413143
	Oblong	413144
	O.D. Ground Special Shape	41314G
	EDM Required Special Shape	41314E
<b>STRIPPER</b>		
	Round	415141
	Square	415142
	Rectangle	415143
	Oblong	415144
	O.D. Ground Special Shape	41514G
	EDM Required Special Shape	41514E
<b>DIE (HWS)</b>		
	Round	414141
	Square	414142
	Rectangle	414143
	Oblong	414144
	O.D. Ground Special Shape	41414G
	EDM Required Special Shape	41414E

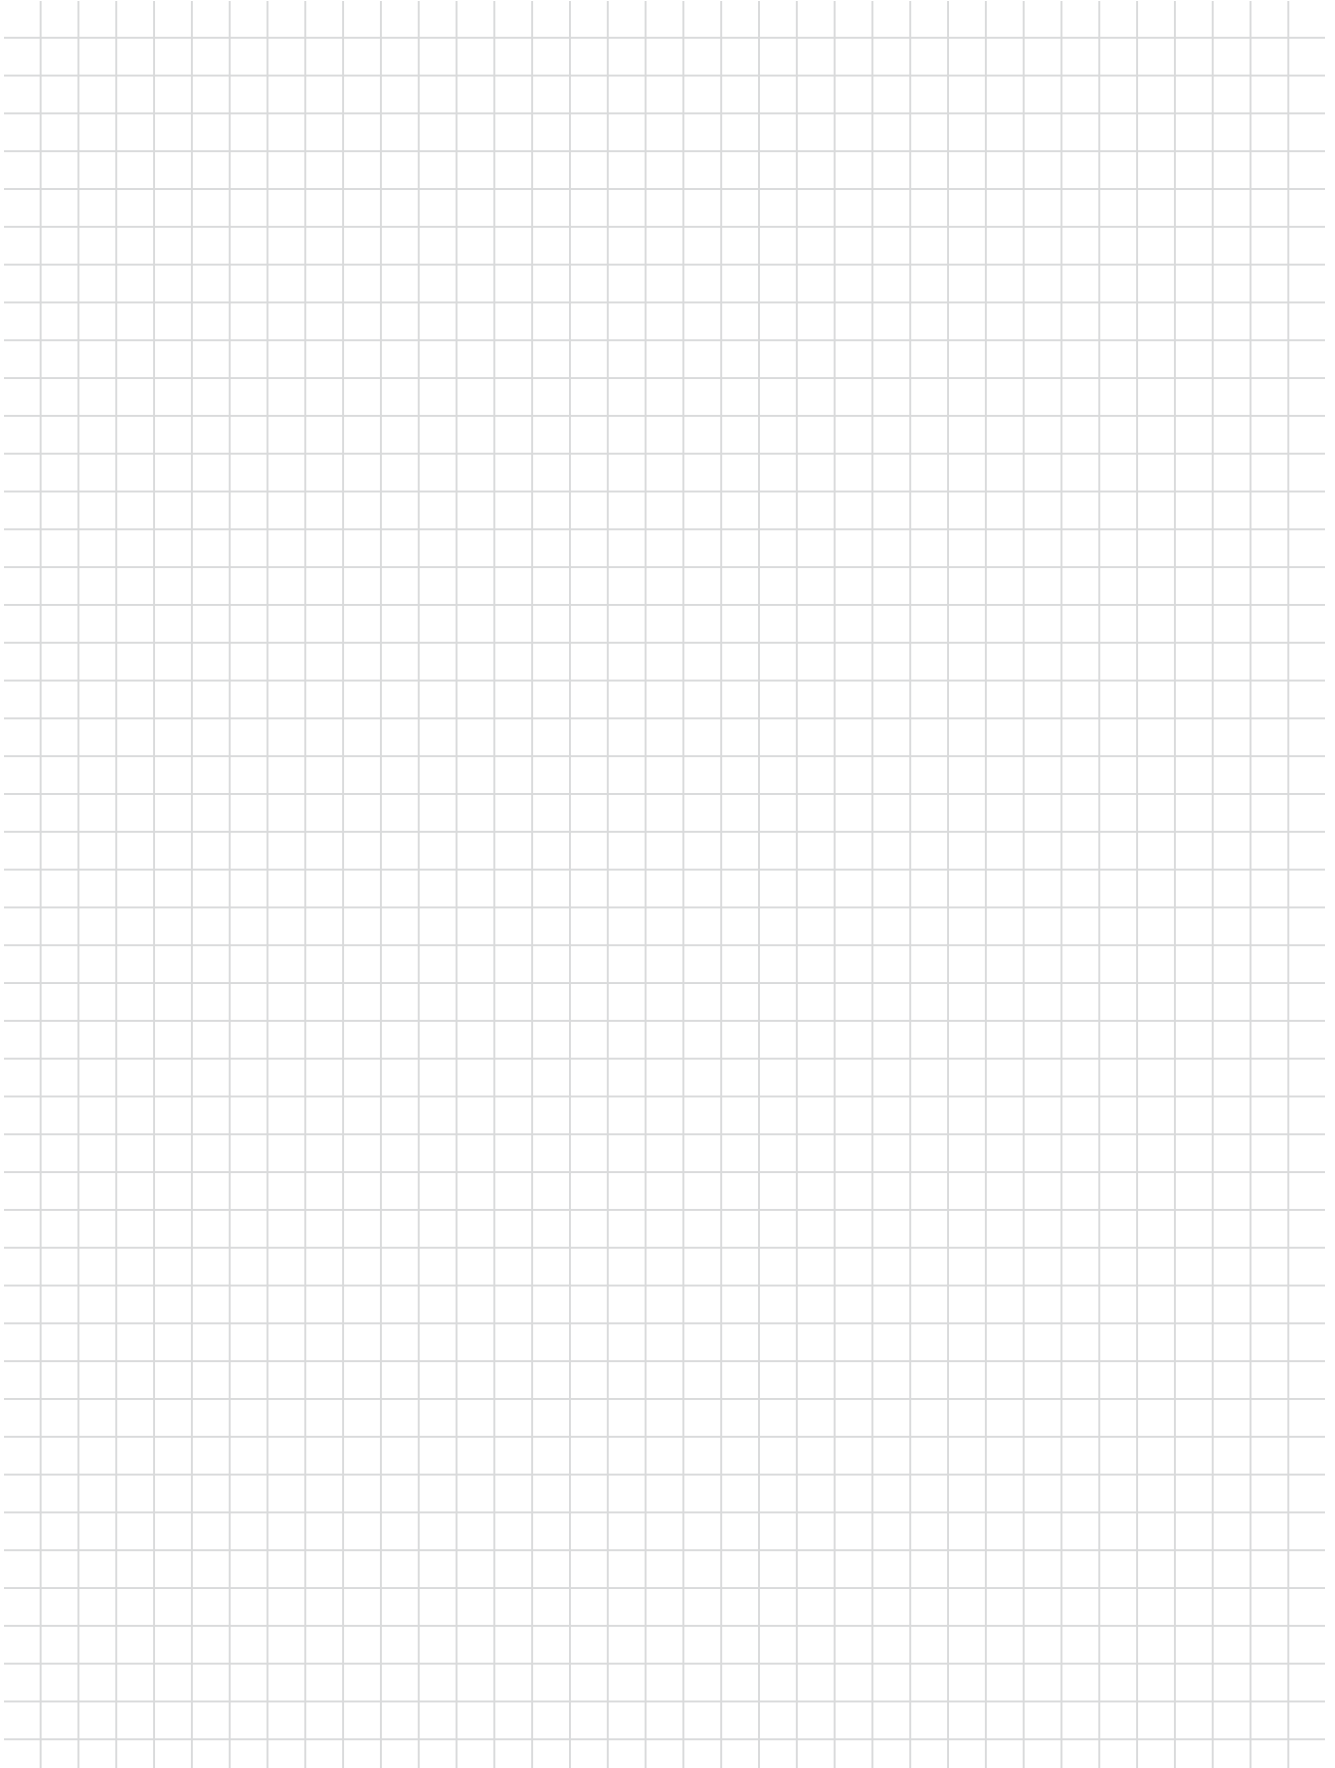
## ADDITIONAL COSTS FOR PUNCHES

- TiCN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

## ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole


















# TECHNICAL INFORMATION

## PASS TOOLS FOR YOUR EUROMAC MULTITOOL SYSTEM












### INDEX

O.D. Ground Special Shapes	page 12
EDM Required Special Shapes	page 13
PASS tool variety	page 14
Lifetime of tools   regrind advice	page 15
PASS coating versions / draw-polishing	page 16
Die versions	page 17
Punches with different shear types	page 18
PASS back taper on punches	page 19
PASS corner radius on punches	page 20
PASS punches with reinforced shoulder	page 21
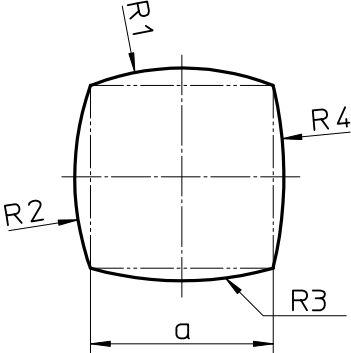
# O.D. GROUND SPECIAL SHAPES

 <p>G01</p>	 <p>G02</p>	 <p>G03</p>
 <p>G04</p>	 <p>G05</p>	 <p>G06</p>
 <p>G07</p>	 <p>G08</p>	 <p>G09</p>
 <p>G10</p>	 <p>G11</p>	

# EDM REQUIRED SPECIAL SHAPES

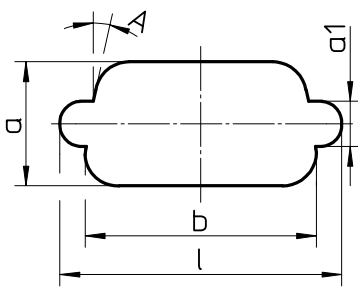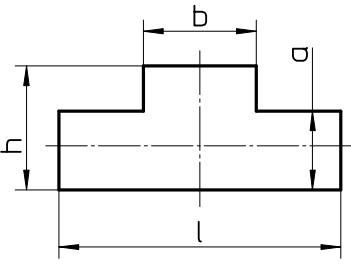 <p>E01</p>	 <p>E02</p>	 <p>E03</p>
 <p>E04</p>	 <p>E05</p>	 <p>E06</p>
 <p>E07</p>	 <p>E08</p>	 <p>E09</p>
 <p>E10</p>	 <p>E11</p>	

# PASS TOOL VARIETY

## HWS

HWS tools are made of a secondary hardened cold work steel with superior toughness. This type of steel is especially suitable for dies.

Advantages for customer:

- excellent cost in accordance to performance

## H-PM®

H-PM® tools are produced with steel made on powder-metallurgical base with a high degree of purity.

This guarantees a segregational uniformed microstructure in the complete cross-section of the tool.

Advantage for customer:

- excellent cost in accordance to performance
- good stability for edges by increased toughness
- high tool lifetime due to the uniformed microstructure
- increased current hit-flex-capability; suitable as an excellent base for dies

## X3-PM

The X3-PM tools are made of a high-end powder-metallurgical steel with the best possible performance characteristics for punches in the punching technology due to the best possible degree of purity.

The segregational uniformed microstructure with high vanadium concentration in the complete cross-section of the punch guarantees best possible wear resistance regarding tool lifetime.

Advantage for customer:

- best efficiency by multiple increase of the punch hit count
- best possible stability for cutting edges
- extremely high abrasion resistance
- utmost compressive strength

## X8-PM

The X8-PM tools are made of a high-end powder-metallurgical steel the best possible performance characteristics for dies in the punching technology caused by best possible degree of purity.

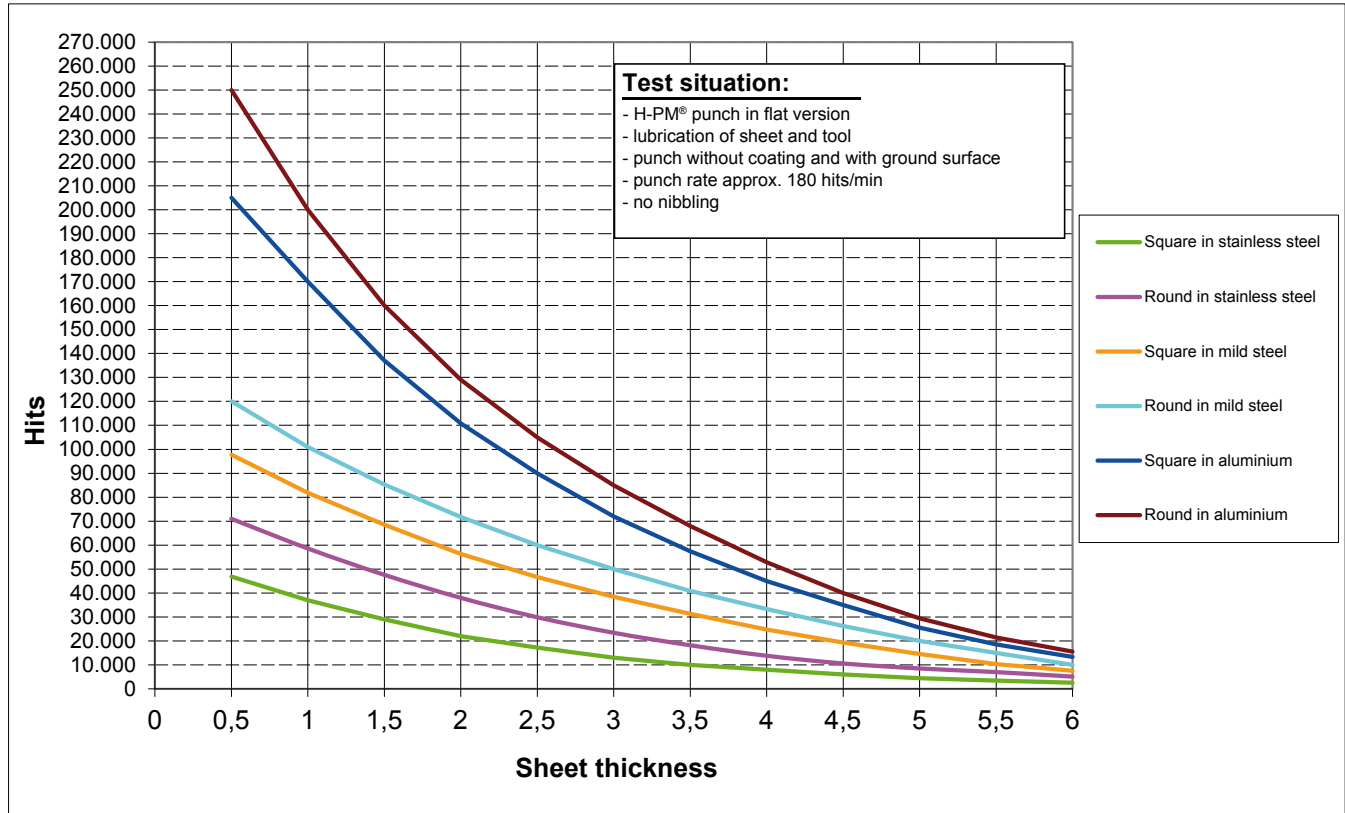
The high ductility of the segregational uniformed microstructure guarantees best possible fatigue limit. This kind of steel is especially suitable for dies with risk-breakage in regard to special shapes.

Advantage for customer:

- best possible absorption of hit-flex stress; prevents fatigue breakage
- high abrasion resistance

# LIFETIME OF TOOLS | REGRIND ADVICE

PASS punches and dies are made of high-end special steel in order to guarantee best lifetime of tools together with high robustness.



INFLUENCING FACTORS	FACTOR
Galvanised steel / stainless steel with foil / aluminium anodised	0,5 - 0,8
No sheet lubrication	0,4 - 0,6
Punch coating (TICN for stainless steel / T-MAX for galvanised steel / A-MAX for aluminium)	2,0 - 4,0
PASS X3-PM punch	6,0 - 10,0
Nibbling	0,7 - 0,9
Notching	0,5 - 0,7
Shear	0,8 - 0,9
Punching rate > 300 hits / min.	0,8 - 0,9
Cutting part with EDM surface	0,4 - 0,8
Cutting part with polished surface	1,5 - 3,0
Cutting part smaller than 1,5x sheet thickness	0,6 - 0,8
Cutting part smaller than 1,0x sheet thickness	0,3 - 0,5
Using of a too small clearance	0,4 - 0,9

An average decrease of the tool life of 5 - 10% per regrind has to be taken in account for the first regrind.

# PASS COATING VERSIONS / DRAW-POLISHING

## TO REDUCE MATERIAL BUILD-UP

**H-PM®** tools are produced with steel made on powder-metallurgical base with a high degree of purity to fulfill the highest punching demands.

Furthermore we attach great importance to a high quality hardening process by repeated tempering and deep-freeze subsequently.

This process guarantees an extremely high hardness with an outstanding wear resistance of our punching tools.

Associated with modern production methods (grinding of the cutting edges with special grinding wheels) we can ensure that the wide range of different sheet qualities can be punched up to 1.600 N/mm<sup>2</sup> – no matter if it concerns mild alloyed aluminium, mild steel, stainless steel or spring band steel.


A high punch hardness as well as an excellent grinding surface are important in order to counteract the problem with edge build-up.

Tests show us that the well-known TiCN coating is a good coating to increase the lifetime (especially working with stainless steel). However, the problem of material buildup on the edges have not really been counteracted.

Built-up edges are known especially when working with


- galvanised steel
- aluminium

After specialized tests at PASS Stanztechnik AG the below mentioned coatings turned out to be the most successful coatings:



TiCN

for working with  
stainless steel



A-MAX

for dry processing with  
aluminium sheet



T-MAX

for working with  
galvanised sheet / zincor

We recommend draw-polished punch edges to increase tool lifetime and reduce material build up (prices on request):






# DIE VERSIONS
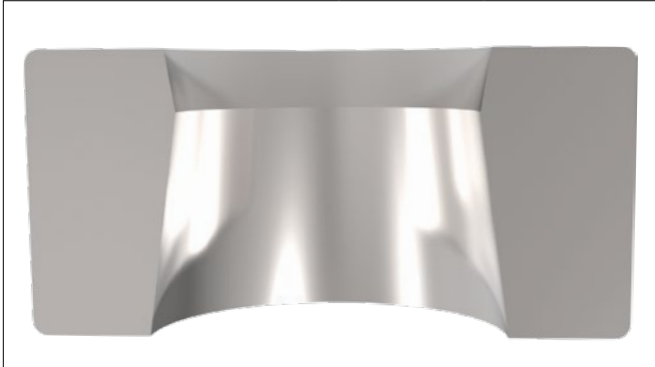
## SLUG-STOP AND SLUG-SNAP (AVOID THE BUILD-UP OF THE SLUGS)

SLUG-STOP (STANDARD)



PASS dies for tooling system THICK TURRET are produced in standard version with a slug-stop version (without additional costs).

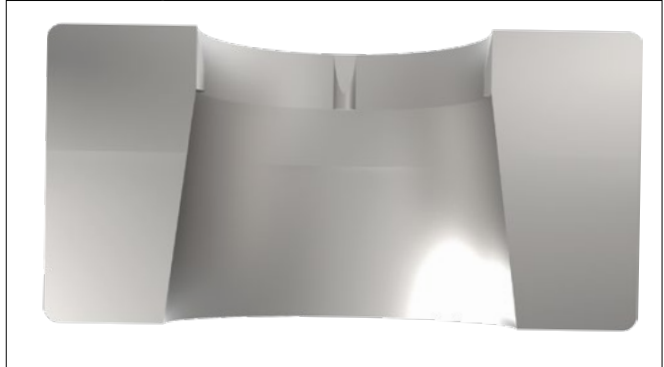
This means that the upper part of the cutting part is produced with a negative angle.

The slug will be held with the complete circumference in the die.

This is not recommended for:

- shapes smaller than 1,25 mm
- clearance smaller 0,1 mm

SLUG-SNAP (SPECIAL VERSION - ADDITIONAL COSTS)




Alternatively we offer our slug-snap version (additional costs).

In this case special holding bolts are included in the die, clamping the slug positively (better than the slug-stop version).

The slug-snap version is also more convenient for shapes smaller than 1,25 mm and clearance smaller 0,1 mm.

# PUNCHES WITH DIFFERENT SHEAR TYPES

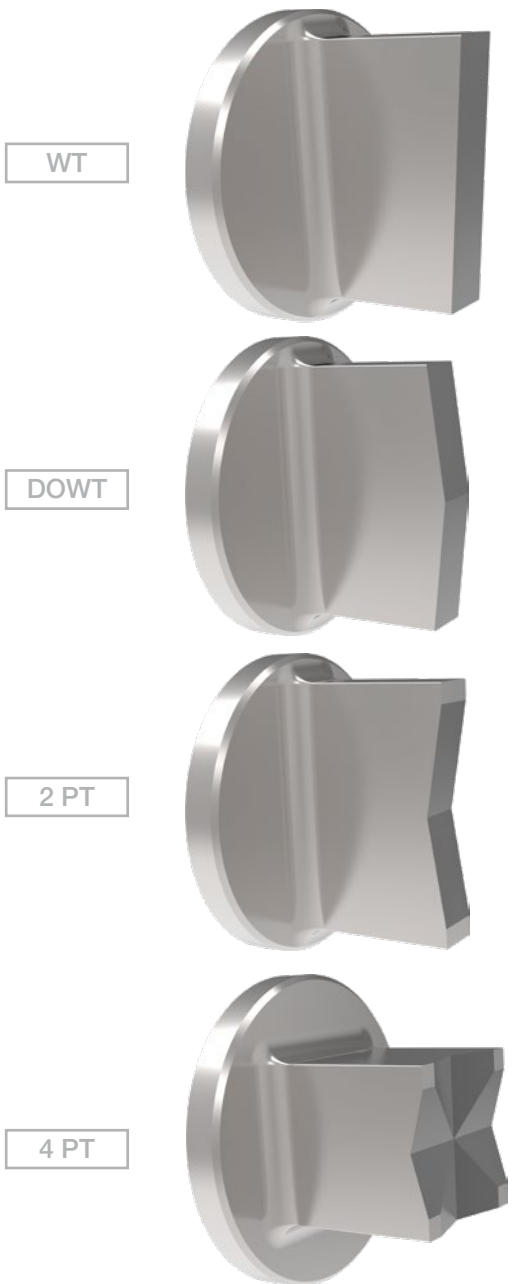

WT

DOWT

2 PT

4 PT

DESCRIPTION


WT	
Advantage	easy regrindable
Disadvantage	lateral forces
DOWT	
Advantages	easy regrindable no lateral forces
Disadvantage	only reasonable for big shapes
2 PT	
Advantages	no lateral forces optimal die cutting
Disadvantages	only reasonable for big and slim shapes difficult to regrind
4 PT	
Advantages	no lateral forces optimal die cutting suitable for trimming
Disadvantages	only reasonable for big shapes difficult to regrind

# PASS BACK TAPER ON PUNCHES

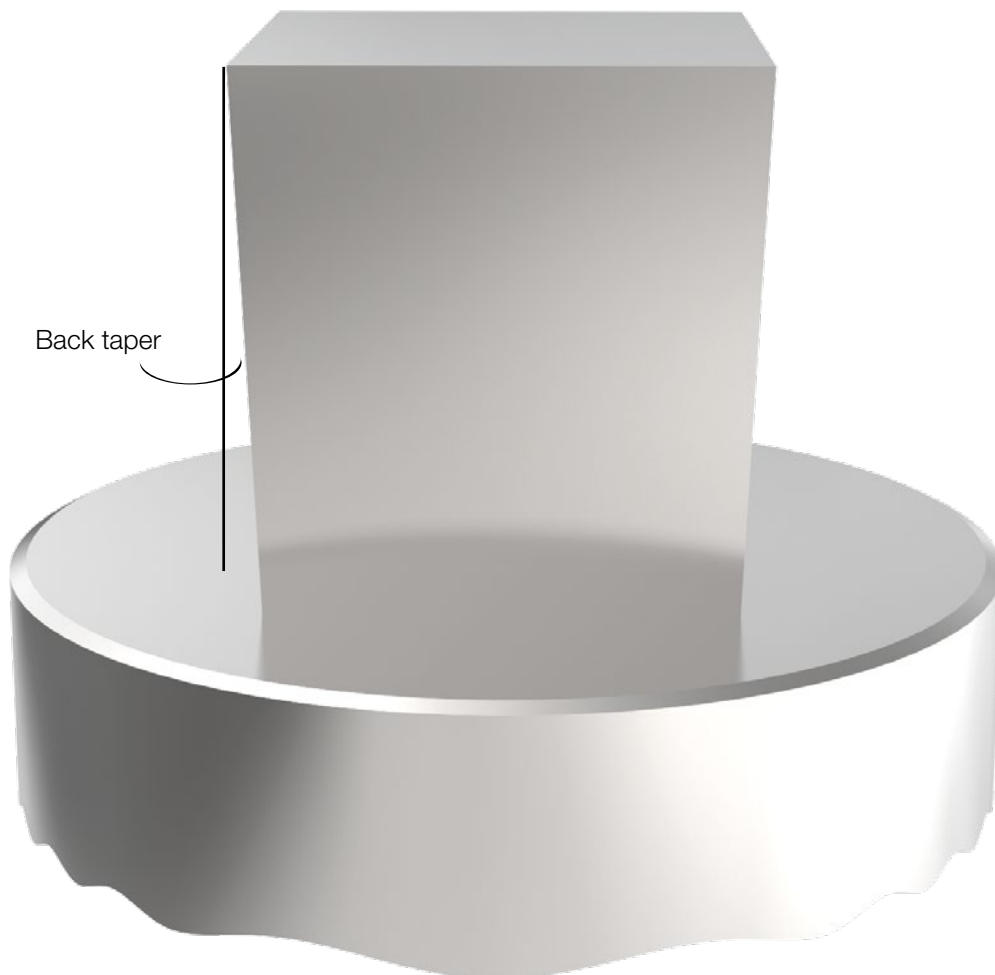PASS punches are normally produced with back taper to reduce galling and premature punch wear.

However it should be mentioned that back taper is very important when punching materials such as stainless steel or very thick material to reduce galling and eliminate breakage of the tool corners and edges.


We recommend a line polished version for cutting parts, which have to be produced sink-eroded (special shape with internal shape, e.g. cross-form, U-form, etc.) and in high quality sheets.



# PASS CORNER RADIUS ON PUNCHES

PASS punches are automatically produced with corner radius  $R = 0,15$  mm. This process increases the lifetime as the corner abrasive wear will be decreased considerably.

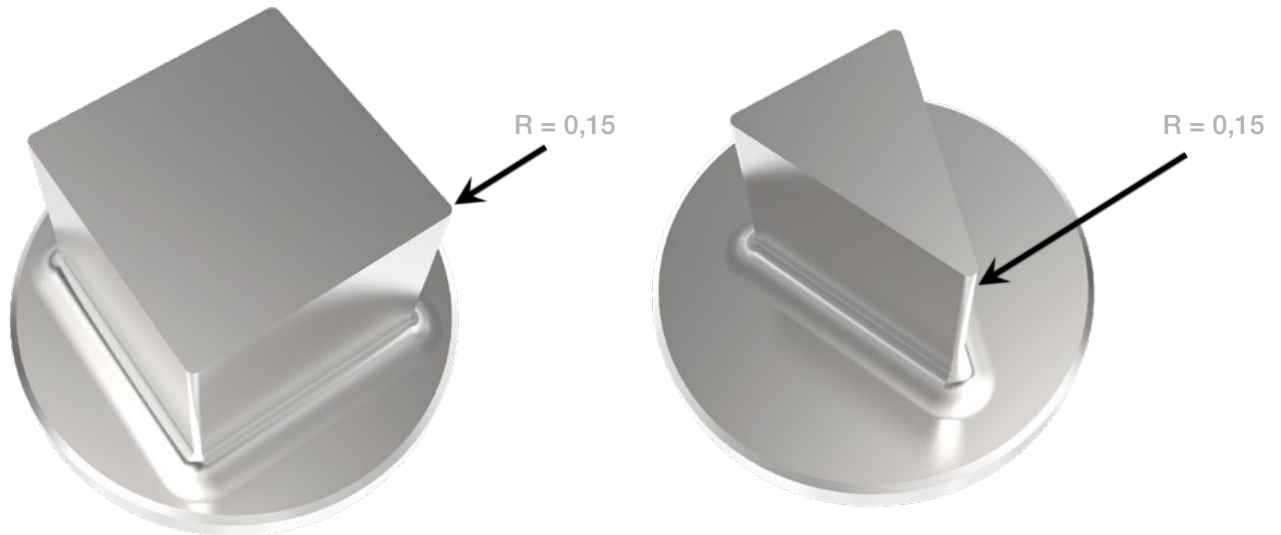
E.g.: square and triangle punch



The corner radius can be changed on customer's request.

E.g.:

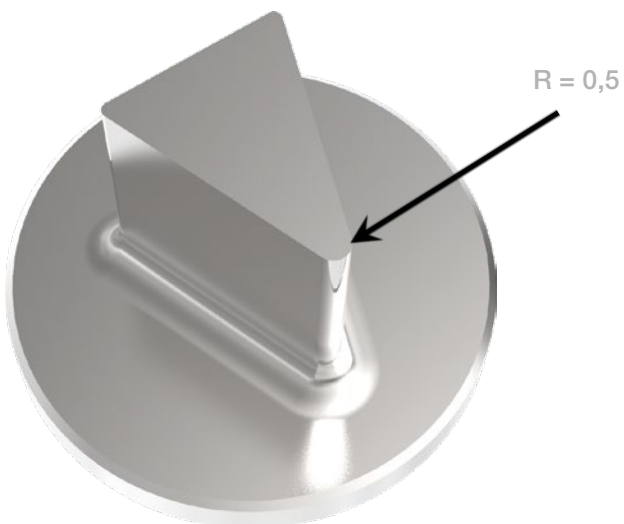$R = 0,5$  mm instead of  $R = 0,15$  mm for stainless steel in order to increase tool life.




# PASS PUNCHES WITH REINFORCED SHOULDER

All PASS punches are produced with a 4 mm reinforced shoulder as soon as the cutting section is required smaller than 4 mm.

This guarantees that you will get a tool with highest stability in order to punch also thicker and high-strength sheets.

However, the correct stripper size has to be selected in subject to machine type, tool design, sheet thickness (1), punching depth (2), stripper thickness (3) and stripper overlap (4).

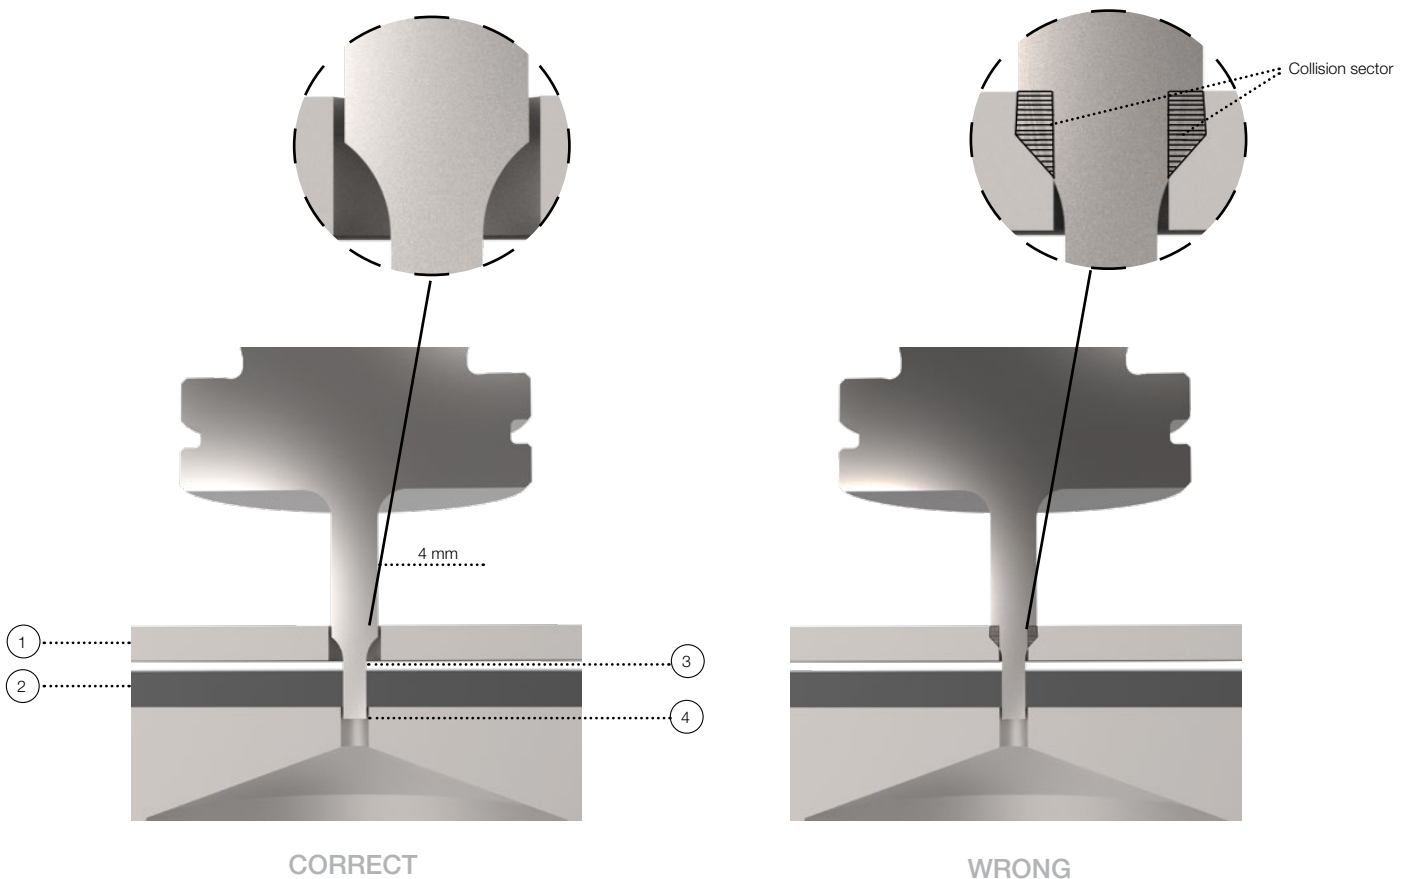It might be possible that it gets necessary to use a stripper with an appropriate big shape (width min. 4.5 mm) in order to get sure that the reinforced punch shoulder can immerse into the stripper.



# NOTES

A large grid of graph paper for taking notes, consisting of 20 columns and 40 rows of small squares.

A large grid of graph paper for taking notes, consisting of 20 columns and 40 rows of small squares.

**SALVAGNINI** | **THICK TURRET** | **TRUMPF**



Am Steinkreuz 2  
95473 Creußen | Germany

**WEB:** [www.pass-ag.com](http://www.pass-ag.com)  
**MAIL:** [info@pass-ag.com](mailto:info@pass-ag.com)

**FON:** +49 (0) 92 70 / 9 85 - 0  
**FAX:** +49 (0) 92 70 / 9 85 - 99