


## EXTRUSION TOOL

## GEWINDEDURCHZUGSWERKZEUG

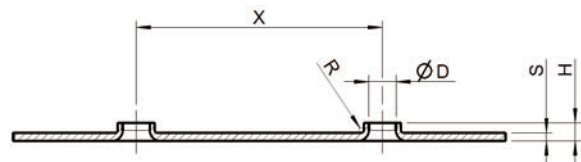

H	S0.5	S1	S1.25	S1.5	S2	S2.5	S3
M2.5	1.3	2.0	2.2	2.5			
M3	1.5	2.0	2.2	2.5	3.0		
M4		2.2	2.2	2.5	3.3	4.0	
M5		2.5	2.5	2.8	3.6	4.3	4.5
M6		2.6	2.8	3.2	3.6	3.8	4.5
M8			3.0	3.4	4.0	4.5	4.8

	øD (cut thread / Gewinde geschnitten)	øD (formed thread / Gewinde geformt)
M2.5	2.05	2.3
M3	2.5	2.75
M4	3.3	3.65
M5	4.2	4.65
M6	5	5.55
M8	6.8	7.4

## BASIC INFORMATION / BASISINFORMATIONEN

Material:	
Sheet thickness „s“ / Blechstärke „s“:	
Machine / Maschine:	
Size / station Größe / Station:	
Direction of forming / Umformrichtung:	upform / nach oben <input type="checkbox"/>
	downform / nach unten <input type="checkbox"/>
Customer information / Kundendaten:	

## TOOL INFORMATION / WERKZEUGANGABEN IN MM

Thread / Gewinde					
M2.5	M3	M4	M5	M6	M8
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cut / Geschnitten <input type="checkbox"/>			Formed / Geformt <input type="checkbox"/>		
H:					
X: Standard: 30 mm					

TRUMPF

THICK TURRET

SALVAGNINI

Order\_forms\_Special\_Tools 04/2020 Version 2.0